




Technical Data

**ClassicSeries®
RECESSED
PAPER TOWEL DISPENSER
AND WASTE RECEPTACLE**

B-369

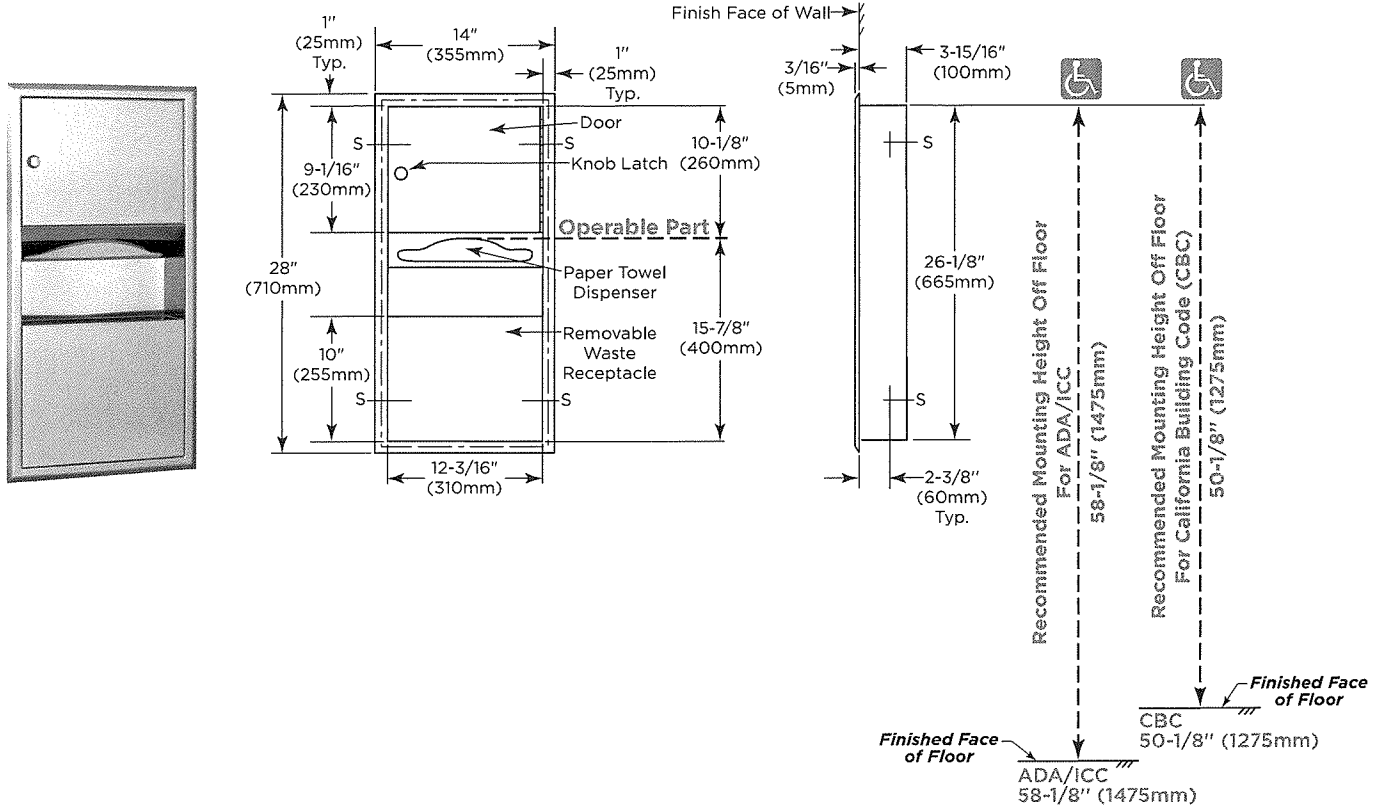

Rough Wall Opening
 12-5/8" (320mm) wide
 26-5/8" (675mm) high
 4" (102mm) minimum recessed depth

ADA/CBC Installation Guidance

***Operable Part:** Top of paper towel dispenser opening

Maximum mounting height of Operable Part:
 ADA/ICC: 48" above finished floor (AFF)
 CBC: 40" above finished floor (AFF)

*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

MATERIALS:

Cabinet — 18-8, Type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish.

Flange — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn and beveled, one-piece, seamless construction.

Door — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish. Secured to cabinet with a full-length stainless steel piano-hinge. Equipped with a knob latch.

Paper Towel Dispenser — 18-8, Type-304, 22-gauge (0.8mm) stainless steel with satin finish. Capacity: 350 C-fold or 475 multifold paper towels.

continued . . .

Optional: Order Bobrick Model No. 369-130 TowelMate[®] available as an optional accessory. TowelMate accessory allows for paper towels to dispense one at time without bulging or sagging, or falling through the towel tray opening. The 90 degree return on the towel guide prevents papers from falling forward and out when door is opened for servicing.

Waste Receptacle — 18-8, Type-304, Heavy-gauge stainless steel with satin finish. Top edges are hemmed for safe handling. Retaining Hook. Capacity: 2-gal. (7.6-L).

OPERATION:

Paper towel dispenser will dispense C-fold or multifold paper towels without adjustment. Rounded towel tray has hemmed opening to dispense paper towels without tearing. Waste receptacle is retained in cabinet by a retaining hook feature and is removable for servicing.

INSTALLATION:

Provide framed rough wall opening 12-5/8" wide x 26-5/8" high (320 x 675mm). Minimum recessed depth required to finish face of wall is 4" (102mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between flange and finish face of wall. Mount unit in wall opening with shims between framing and cabinet at all points indicated by an S, then secure unit with #8 x 1-1/4" (4.2 x 32mm) sheet-metal screws furnished by manufacturer.

SPECIFICATION:

Recessed paper towel dispenser and waste receptacle shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Flange shall be drawn and beveled, one-piece, seamless construction. Door shall be secured to cabinet with a full-length stainless steel piano-hinge and equipped with a knob latch. Paper towel dispenser shall dispense 350 C-fold or 475 multifold paper towels without adjustment or use of adapters. Removable stainless steel waste receptacle shall be retained in cabinet by a retaining hook feature, have top edges hemmed for safe handling, and shall have a minimum capacity of 2-gal. (7.6-L).

Recessed Paper Towel Dispenser And Waste Receptacle shall be Model B-369 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.